


## HOP5710-28TX full gigabit access 10 Gigabit uplink weak Layer 3 switch

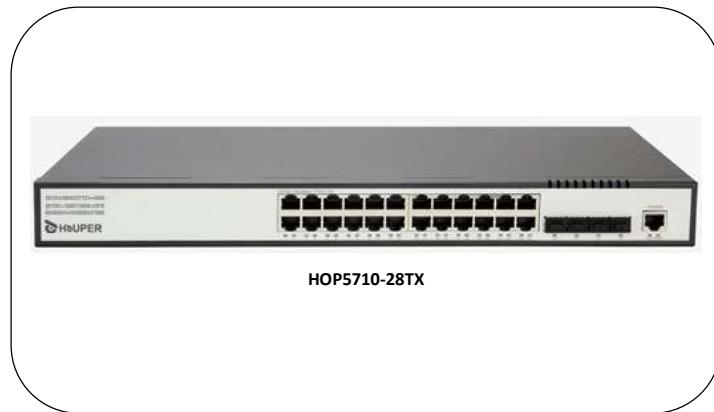

HOP5710-28TX

## Features:

- 24 gigabit electrical ports, 4\*10 gigabit optical ports, 10 gigabit optical ports can be adapted to gigabit; ☐
- Ultra-high switching capacity, support full port wire-speed forwarding performance;
- Weak Layer 3 access switch, supporting full port hardware Layer 3 wire-speed forwarding performance; ☐
- High-performance and low-power network processor, support the line sleep capability of green Ethernet, and low power consumption of the device; ☐
- Support IPv4/IPv6 dual protocol stack platform, support RIP/OSPF/PIM and other routing protocols; ☐
- Support multiple link redundancy and network redundancy protocols such as VRRP/ERPS/MSTP/FlexLink/MonitorLink; ☐
- Support ACL security filtering mechanism, provide security control functions based on MAC, IP, L4 port and port level; ☐
- Support Ethernet OAM 802.3ag (CFM), 802.3ah (EFM) and other Ethernet link detection mechanisms; ☐
- Support remote user authentication based on Tacacs+/Radius, support Local local user authentication; ☐
- Support SP/WRR/SP+WRR priority algorithm to ensure the transmission of various priority service flows on demand; ☐
- Support IPv4/IPv6 static routing function; ☐
- Support multi-port mirroring analysis function, support mirroring analysis based on business flow; ☐ Support static and flexible QinQ functions; ☐
- Support IPV4/6 unicast routing based on policy, support flexible forwarding policy; ☐ Support CLI command line management based on serial port, Telnet, SSHv2; ☐

- Support RFC1213 SNMP network management; ☐
- Support configuration management based on WEB page; :

## Product Specifications:

## Physical interface:

- 10 Gigabit optical ports: 4 10 Gigabit optical ports, 10 Gigabit optical ports can be adaptively connected to Gigabit optical ports, type SFP/SFP+/LC;
- Gigabit electrical ports: 24 gigabit electrical ports, the gigabit electrical ports can be adapted to 10/100/1000M, type RJ45; ☐
- Console port: management serial port, used for command line management, type RS232;

## Working environment:

- Operating temperature: -15C~55C; ☐
- Storage temperature: -40C~70C; ☐
- Relative humidity: 10%~90%, no condensation;

## Power specification:

- Power consumption: ☐ single power supply, AC;
- Input power supply: AC: input 90~264V, 47~67Hz; ☐
- Power consumption of the whole machine: full load power consumption ≤ 22W, no-load power consumption ≤ 13W Mechanical structure: ☐
- Chassis shell: metal shell, air-cooled heat dissipation;
- Case size: external dimension (length\*width\*height) (mm) 440\*210\*44; ☐ Installation method: standard 19-inch 1U rack-mounted installation;

## Mechanical structure:

- Chassis shell: metal shell, air-cooled heat dissipation;
- Chassis size: dimensions (length \* width \* height) (mm) 440 \* 210 \* 44;
- Installation: Standard 19 inch 1U rackmount installation;

## Ordering Information:

Product model	Product description
HOP5710-28TX	24*10/100/1000MBase-T, 4*1000M SFP/10GE SFP+, single AC power supply